



Safety Bulletin

IMPORTANT SAFETY INFORMATION FOR MIDWEST CUTTING STATIONS: 5033, 5033R, CS5230, CS5236-16, CS4330/5840/5437

JULY 2017

In January 2008, Midwest Automation began including a pneumatically actuated, side shield as standard equipment on all CS 4330/5840/5437 Cutting Stations.

This was done to provide a physical barrier to the area where the saw blade and router motors do the actual cutting of the countertop.

Prior to this, flexible side curtains were included as standard equipment, and before that, as part of the dust enclosure kit, sold as an option.

For machines manufactured prior to January 1, 2008, we are now offering a retrofit kit to our valued customers at the reduced price listed below.

The Side Shield Kit includes:

- Side shields
- Rotating mechanism
- Pneumatic cylinders
- Electrical controls
- Mounting hardware
- Installation instructions

The side shields are designed with a series of 2-inch slats that conform to the countertop backsplash in the down position. The shield rotates up and down with the operation of the clamp-down cylinders, creating a physical barrier to the inside of the saw.

We are encouraging all of our Cutting Station customers with saws that have open ends or flexible side curtains to order this kit for increased safety, and believe this side shield kit will pass OSHA inspection.

Work Smart. Be Safe.



New Saw Side Shield Kit Now Available!

Models 5033/ 5033R/ CS5230/ CS4330

(Part Number 40 944 00)

CALL FOR PRICING

Models CS5236/ CS5840/ CS5437

(Part Number 40 944 01)

CALL FOR PRICING

*For more information or to order your kit,
Please Contact Your Midwest Parts & Service Team
Toll-free at 1-800-697-1444*

or


Email at service@midwestautomation.com

CLOSE UP SHOTS FOUND ON THE FOLLOWING PAGE...

SAW SIDE SHIELD - CLOSE UP SHOTS



Side Shield in Down Position

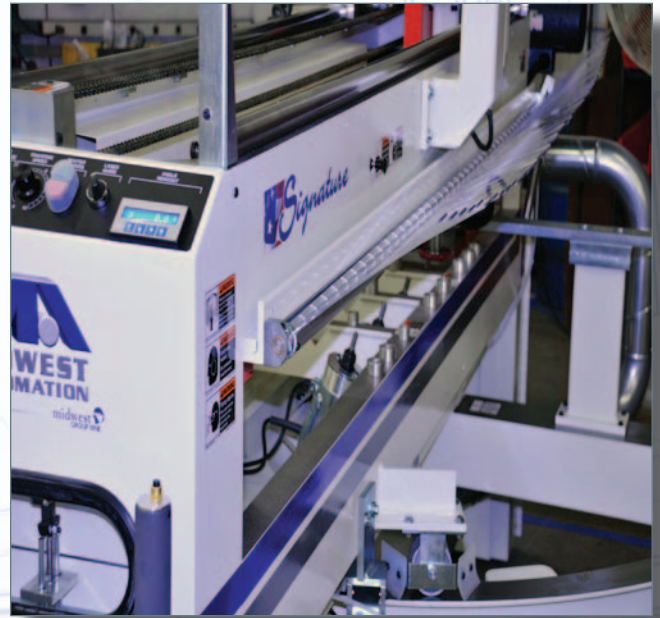

Side Shield in Up Position



Side Shield from Rear of Machine
with Countertop



Side Shield from Front of Machine
with Countertop

SOL. 11